



## Standard Features

- Aluminum frame
- Cover and Type 304 SS Fan Guards
- Built-In 0-100°F adjustable thermostat
- Standard line cord
- Integral Condensate Drip Pan (vertical orientation)
- Environmentally Friendly
- No CFC's, Oils or Gases
- No Maintenance
- Mounts and operates vertically or horizontally
- 12 month warranty
- Made in the USA

## Included

- Installation and Operation Manual
- Mounting gasket
- Stainless Steel Mounting Hardware

## Standard Voltages

220VAC 50/60 Hz

Model #	Available Voltage	Input Voltage Range	Current	Heating Capability	Mounting Flange Dimensions	Certification	Weight	Mounting
AAC-170-4XT	240VAC	180 - 264 V	10.3 A	N/A	34" H x 20" W	N/A	145 LBS.	N/A
AAC-170-4XT-HC	240VAC	180 - 264 V	10.3 A	800 watts	34" H x 20" W	N/A	145 LBS.	N/A

NEMA Rating:	N/A
Cooling T-Stat set range:	0-100°F
T-Stat Accuracy:	±1°F
T-Stat Hysteresis:	4F
Heating T-stat set point:	ON @ 45F, OFF @ 55F
Cold-side airflow:	400 cfm
Hot-side airflow:	530 cfm
Operating temperature:	-4 to 140 °F
Storage temperature:	-4 to 185°F
Warranty:	12 months

## Optional Equipment

- Condensate Drip Pan (horizontal)
- Rain Shroud (vertical and horizontal)
- Extension Frame
- Digital Temperature Controller
- Black Epoxy Coating
- Extended Warranty


## Customizations

- Stainless Steel Construction for Extreme Environments
- Custom color finish
- Increased heating capability
- Non-standard Mounting Configurations
- And More - Please inquire for details*

# 5500 BTU - 170 SERIES

THERMOELECTRIC AIR CONDITIONER

## AAC-170 Performance Chart

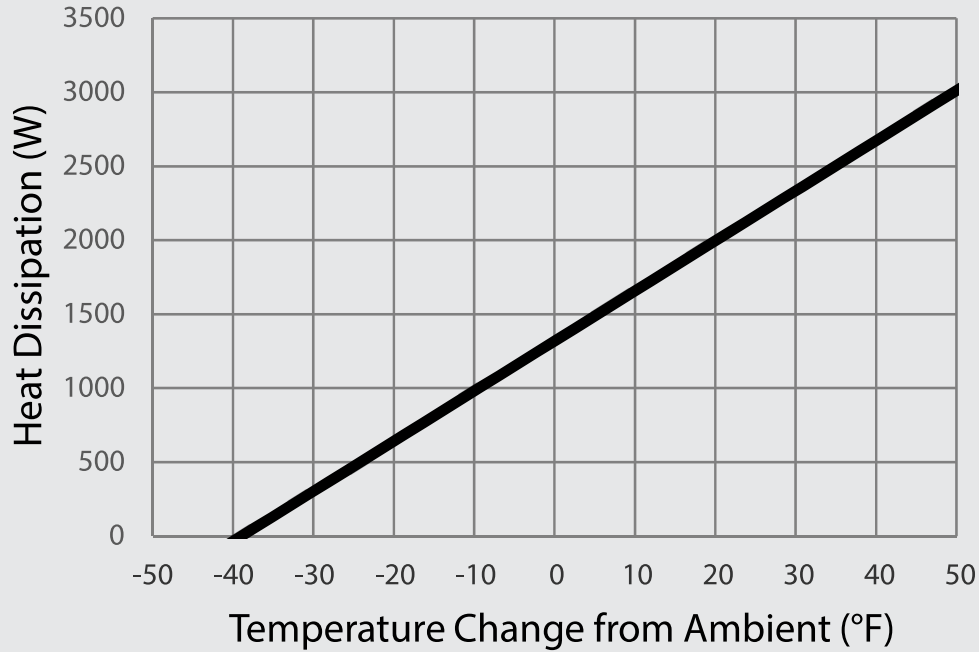

Performance at 120°F Ambient Temperature

