



## Standard Features

- Type 304 Stainless Steel frame, Cover and Fan Guards
- Built-In 0-100° adjustable thermostat
- Auxillary power-supply for 120/220VAC operation
- NEMA 5-15 Plug on AC-powered units
- Integral Condensate Drip Pan
- Environmentally Friendly - No CFC's, Oils or Gases
- No Maintenance
- Vertical mounting only
- 12 month warranty
- Made in the USA

## Included

- Installation and Operation Manual
- Mounting gasket
- Stainless Steel Mounting Hardware

## Standard Voltages

- 120VAC 50/60 Hz
- 240VAC 50/60 Hz
- 24/28VDC

Model #	Available Voltage	Input Voltage Range	Current	Heating Capability	Mounting Flange Dimensions	Certification	Weight	Mounting
AAC-120-4XT	120-240VAC	100 - 240 V	2 A, 1 A	N/A	8.25" H X 6" W	N/A	12 LBS.	THROUGH
AAC-120-4XT-F	120-240VAC	100 - 240 V	2 A, 1 A	N/A	8.25" H X 6" W	N/A	13 LBS.	FLUSH
AAC-120-4XT-HC	120-240VAC	100 - 240 V	2 A, 1 A	100 watts	8.25" H X 6" W	N/A	12 LBS.	THROUGH
AAC-120-4XT-HCF	120-240VAC	100 - 240 V	2 A, 1 A	100 watts	8.25" H X 6" W	N/A	13 LBS.	FLUSH
AAC-120-4XT-DC	24/28VDC	22 - 28V	3.8/4.3 A	N/A	8.25" H X 6" W	N/A	10 LBS.	THROUGH
AAC-120-4XT-HC-DC	24/28VDC	22 - 28V	3.8/4.3 A	100 watts	8.25" H X 6" W	N/A	11 LBS.	THROUGH
AAC-120-4XT-F-DC	24/28VDC	22 - 28V	3.8/4.3 A	N/A	8.25" H X 6" W	N/A	10 LBS.	FLUSH
AAC-120-4XT-HCF-DC	24/28VDC	22 - 28V	3.8/4.3 A	100 watts	8.25" H X 6" W	N/A	11 LBS.	FLUSH
AAC-120-4XT-CE	240VAC	100 - 240 V	1 A	N/A	8.25" H X 6" W	CE	12 LBS.	THROUGH
AAC-120-4XT-F-CE	240VAC	100 - 240 V	1 A	N/A	8.25" H X 6" W	CE	13 LBS.	FLUSH
AAC-120-4XT-HC-CE	240VAC	100 - 240 V	1 A	100 watts	8.25" H X 6" W	CE	12 LBS.	THROUGH
AAC-120-4XT-HCF-CE	240VAC	100 - 240 V	1 A	100 watts	8.25" H X 6" W	CE	13 LBS.	FLUSH

NEMA Rating:	4X
Cooling T-Stat set range:	0-100°F
T-Stat Accuracy:	±1°F
T-Stat Hysteresis:	4F
Heating T-stat set point:	ON @ 45F, OFF @ 55F
Cold-side airflow:	35 cfm
Hot-side airflow:	60 cfm
Operating temperature:	DC powered: -4 to 140 °F AC powered: -4 to 104 °F
Storage temperature:	-4 to 194 °F
Warranty:	12 months

## Optional Equipment


- Rain Shroud
- Digital Temperature Controller
- Black Epoxy Coating
- Recessed Frame
- Extended Warranty

## Customizations


- Type 316 SS Construction for extreme environments
- Custom color finish
- Increased heating capability
- 12VDC and 48VDC power configuration
- Non-standard Mounting configurations
- And More - Please inquire for details*

# 200 BTU - 120 SERIES

## THERMOELECTRIC AIR CONDITIONER

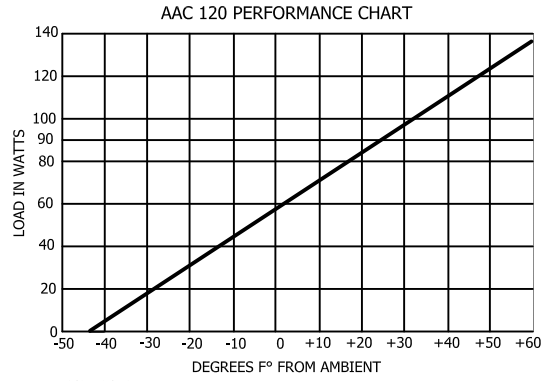

### Through Mount

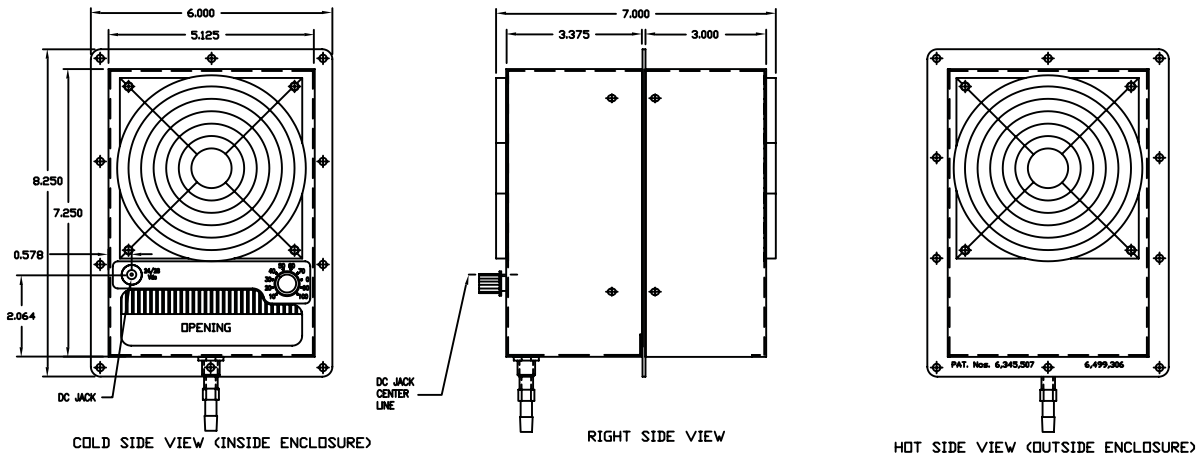

### Flush Mount

